



# AEGIS® TRANSPORT SCALE

PORTABLE ACCURACY FOR DRUM AND GENERAL INDUSTRIAL WEIGHING.

Fairbanks' Aegis® Transport Scale's built-in, two-wheel design allows for easy portability — just tilt the scale back and move it to the next location. Combine the Transport with a Fairbanks battery-powered instrument for the most portable scale available.

Fairbanks' Aegis Transport design is totally unique to the drum scale market. You won't find another manufacturer's drum scale that can compete with the Transport's level of portability, rugged design and precise accuracy.

- **Portable**
- **Washdown option**
- **Live Side rails**
- **Integrated pillar & ramp**
- **NTEP and MC approved**


## Easy to Transport

Choose from a variety of Fairbanks Instruments to fit your specific application need.  
*Shown with 2800 Instrument.*



Washdown models feature drain hole and contiguous welds.

Low 1.5" platform height for easy load introduction.



Easy grip handle with no-slip polyurethane coating.



Large 8" diameter wheels with Polyolefin construction ensure smooth rolling action.

Bubble level located at the center of the weighing surface.

### RELOCATE THE AEGIS® TRANSPORT SCALE IN THREE SIMPLE STEPS.



**1.** TAKE HOLD OF EASY GRIP HANDLE.

**2.** USE FOOT TO LEVERAGE SCALE BACKWARD.



**3.** SCALE EASILY ROLLS TO DESIRED LOCATION. BUILT-IN BREAK POINT PREVENTS SCALE FROM ROLLING WHEN LOWERING PLATFORM BACK TO LEVEL.

Live side rail

Integral ramp


### SPECIFICATIONS

Capacities (lbs) . . . . .	500, 1,000, 2,000, 2,500
Overall dimensions . . . . .	32" x 43" x 60"
Platform	
Size . . . . .	24" x 30"
Height . . . . .	1.5" (3" live side rail)
Finish . . . . .	Smooth plate
Endloading . . . . .	100% of capacity on all models except 2500 lb. capacity, which is rated at 80%
Cable length . . . . .	Platform to instrument = 30 feet
Cable protection . . . . .	PVC jacketed
Construction . . . . .	Mild steel with black, powder coat finish; Type 304 PH stainless steel, brushed
Accessories . . . . .	NEMA 4X J-box; intrinsically safe controller; IP69K load cells optional on mild steel scale
Approvals . . . . .	NTEP CC# 08-044, MC #AM-5674

### LOAD CELL

Capacities (lbs) . . . . .	500, 1,000, 2,000, 2,500
Excitation voltage . . . . .	5 to 15 VDC
Construction . . . . .	17-4 PH stainless steel
Sealing . . . . .	IP67 (mild steel scale) IP69K (stainless steel scale)
Approvals . . . . .	Factory Mutual NTEP CC# 06-065 (mild steel scale) NTEP CC# 04-102 (stainless steel scale)

### DIMENSIONS

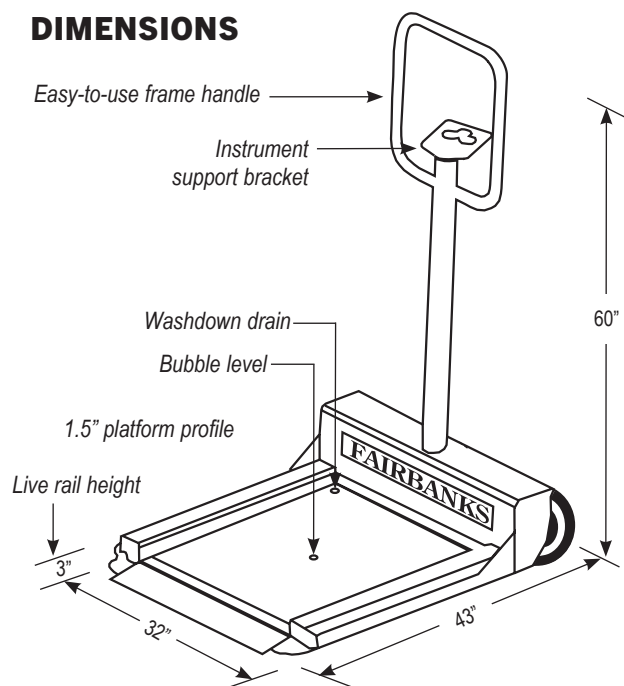

Your Fairbanks Scales Authorized Representative is:

Call toll-free for the representative nearest you:

**(800) 451-4107**

Call between 8:00 a.m. – 5:00 p.m. Central Time

Corporate Headquarters: 6800 W. 64th Street, Overland Park, Kansas 66202

(816) 471-0231 fairbanks.com

