

FAIRBANKS®

2300 SERIES DIGITAL INDICATOR



Fairbanks 2300 Series is a versatile, economical line of digital indicators ideal for a wide variety of general weighing applications.

ALL-PURPOSE INDICATORS

Available in a NEMA 4X stainless steel enclosure, the 2300 Series indicators feature a six-digit, seven-segment, bright red LED display for high visibility, even in low light conditions.

The 2300 is available with a number of standard and optional features, including battery power, so each instrument can be configured to fit a wide array of applications.

Complete front panel configuration and calibration also means installation is both quick and easy. So, whether you use these indicators with bench scales, floor scales, Omnicells™ or even truck scales, you can be assured of accurate, repeatable weighments.

VERSATILE

Not only can these indicators handle just about any basic weighing function, they also have the ability to run up to eight 350 ohm load cells. With a choice of RS232C, RS485 or 20 mA serial outputs, the 2300 Series can be used with a variety of peripheral devices such as printers, remote displays and computers.


These indicators stand alone or can operate in a 485 network configuration. The 2300 Series can also be configured with two external switches to operate the zero, auto tare or print functions.

Each 2300 comes with a mounting bracket suitable for either desk or wall mounting

SPECIFICATIONS

Model	Stainless steel enclosure
Display Size	0.75" high, 6-digit, 7-segment, red LED display
Enclosure	304 stainless steel
Keypad	Full numeric with tactile feedback
Push-button Keys	Tare, auto tare, zero, print, gross/net mode, units selection, enter, program, scroll, I.D. (six characters)
Units	lb, kg, oz, lb-oz, g selectable as primary or secondary units
Capacity	500,000 commercial; 999,950 non-commercial
Graduation Size	0.0002 to 50 in increments of 1, 2 and 5
Load Cells	Up to eight 350 ohm cells or (16) 1000 ohm cells
Power Requirements	117/220 VAC or 6 "D" cell batteries
Serial Interface Selectable	RS232C, RS485, 20 mA (passive)
Accessories	Time/date print module, Smart 4-20 analog output (passive)
Approvals	NTEP CC# 98-131; MC #AM-5286

MEASUREMENTS

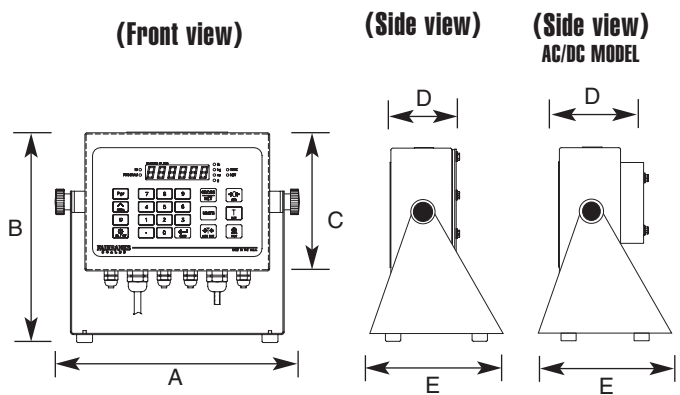

Power	Units	A	B	C	D	E
AC Only	(in)	11.53	9.88	6.50	3.25	6.00
	(mm)	293	251	165	85	150
AC/DC	(in)	11.53	9.88	6.50	5.25	6.00
	(mm)	293	251	165	135	150

QuickFacts™

Models and specifications subject to change without notice.
Printed in the USA. © Fairbanks Scales Inc.

Call toll-free for the Fairbanks representative nearest you:

(800) 451-4107

Internet Address: <http://www.Fairbanks.com>

08/08

100379