

FAIRBANKS[®]

REMOTE DISPLAY 1605 SERIES



Fairbanks Scales' high-intensity LED remote display is designed for high-readability in all lighting conditions with viewing distances up to 300 feet.

DESIGNED TO WITHSTAND THE ELEMENTS

Fairbanks Scales' 1605 Series remote displays are made to perform in the harsh, real-world environments that trucking applications demand. Wet, dirty, dusty, hot, cold — outdoor conditions do not matter to the 1605, it just keeps on displaying. With a unique learning ability, the 1605 is compatible with every known scale instrument that has continuous output capability.


1605 FEATURES

- Bright red, high-intensity LED with 5.0" characters.
- NEMA 3 rated enclosure for outdoor use.
- Auto intensity sensor that automatically adjusts display brightness for existing lighting conditions.
- Gross and Net legends (GR-NT).
- LB and KG legends.
- Standard interfaces include RS232, RS485 and 20mA (active or passive). Wireless RS232 accessory sold separately.
- Programmable learning interface.
- Time and date capability (standard).
- Optional temperature module.

SPECIFICATIONS

Display type.	High-intensity, light emitting diode (LED)
Digit color/size.	Bright red, 5.0"
LED life expectancy	More than 11 years
Time/Date functions	Standard
Power	117 VAC +/- 15% 50/60 Hz, 100 mA
Storage Temperature	0° F to 150° F
Interface options	RS232 RS485 20mA (active or passive)
Enclosure material	Painted steel, black, powder coat
Enclosure rating	NEMA 3
Viewing distance	Up to 300 feet
Mounting options.	Pole or wall mount (see accessories below)
Humidity	0% to 95% non-condensing
Shipping weight.	35 lbs
Accessories.	Optional temperature module; Pole and pole mounting hardware; Wireless RS232

DIMENSIONS

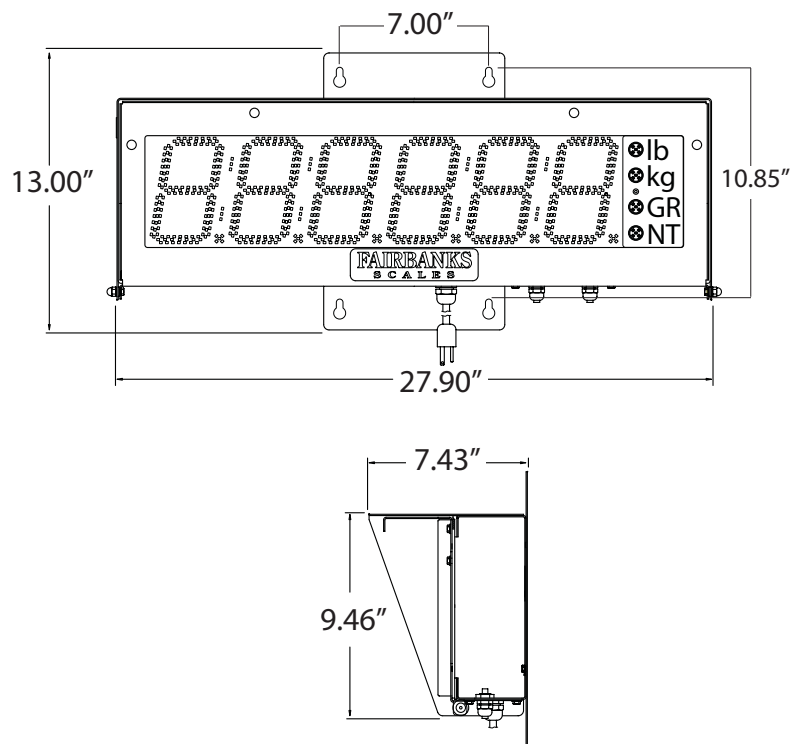

QuickFacts™

Models and specifications subject to change without notice.
Printed in the USA. © Fairbanks Scales Inc.

Call toll-free for the Fairbanks representative nearest you:

(800) 451-4107

Internet address: <http://www.Fairbanks.com>