


# Yellow Jacket

Mild Steel Floor Scales




• WAREHOUSING • GENERAL INDUSTRIAL • SHIPPING & RECEIVING • FILLING • RENTAL • PALLET

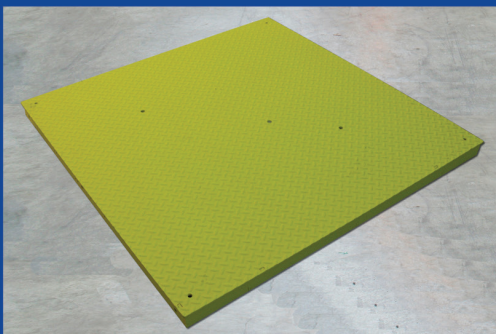

VISIT OUR WORLD TODAY  
[WWW.FAIRBANKS.COM](http://WWW.FAIRBANKS.COM)

# Yellow Jacket

Mild Steel Floor Scales

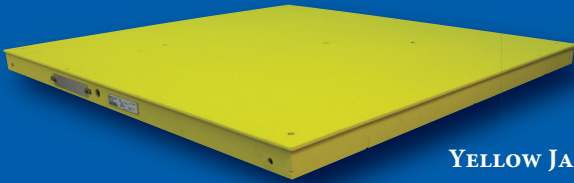

**YELLOW JACKET  
WITH SMOOTH DECK**

The Yellow Jacket Floor Scale is finished with a safety yellow powder coat paint that is easy for forklift operators to see, even in low-light warehouse environments. The scale is constructed of durable Type A36 carbon steel and has a unique multi-ribbed understructure support design, made to provide years of uninterrupted and accurate performance.

## GREAT CHOICE FOR A VARIETY OF APPLICATIONS

The Yellow Jacket is available in a 4' x 4' design, with either 2,500 pound or 5,000 pound capacity. Fairbanks engineers created this revolutionary scale for optimum weight analysis. Its design meets or exceeds most application requirements. A competitive offering in a competitive market — the Yellow Jacket Floor Scale.

## FEATURES


- Two capacities: 2,500 lbs. and 5,000 lbs.
- 4' x 4' platforms with 3" profile.
- 1/4" thick deck plate with lifting eyebolts.
- Safety tread or smooth deck.
- NTEP and FM approved load cells.
- NTEP approved platform.
- Unique multi-ribbed understructure support.
- Durable, non-slip powder coat paint (safety yellow).
- Top access leveling with built-in bubble level.



**YELLOW JACKET WITH  
SAFETY TREAD DECK  
AND OPTIONAL SAFETY  
TREAD RAMP**

## SPECIFICATIONS

Platform . . . . .	0.25" thick deck (smooth or safety tread)
Platform Height . . . . .	3"
Platform Sizes/Capacities . . . . .	4' x 4' — 2.5 k 4' x 4' — 5 k
Overload Capacity . . . . .	150% of rated scale capacity
Cable Length . . . . .	30' (platform to instrument)
Construction . . . . .	Mild steel: Type A36 carbon steel
Paint . . . . .	Safety yellow powder coat paint
Grade Level . . . . .	In operation, scale must be firmly supported at all four corners and within 3° of level
Accessories . . . . .	Ramps, bumper guards, lifting eyebolts, bolt down plates, quick disconnects, stand-alone pillar, factory calibration
Approval . . . . .	NTEP CC# 10-008
Load cell	
Construction . . . . .	Mild steel
Resistance . . . . .	350 Ω ± 2 Ω
Approvals . . . . .	NTEP CC# 06-079, Factory Mutual

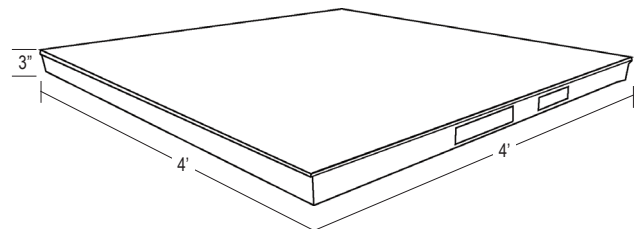

Call toll-free for the representative nearest you:

**(800) 451-4107**

Call between 8:00 a.m. – 5:00 p.m. Central Time

Corporate Headquarters: 6800 W. 64th Street, Overland Park, Kansas 66202  
(816) 471-0231 Internet Address: <http://www.Fairbanks.com>



St. Johnsbury manufacturing facility registered in compliance with ISO 9001.

